



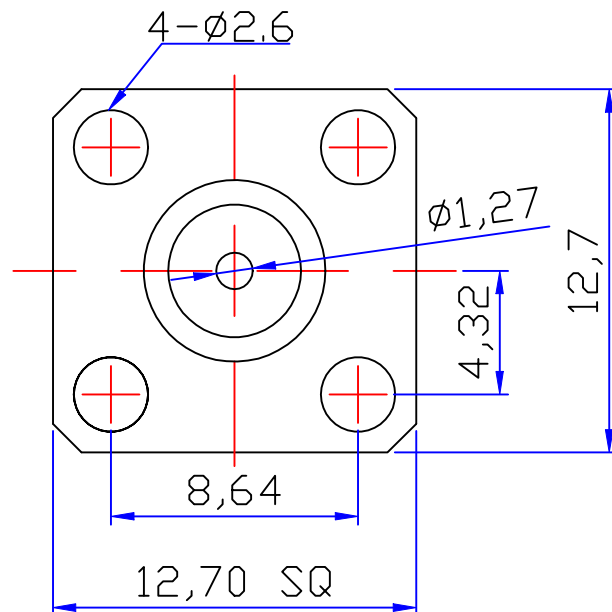

Product NO.	Renhotec-612-0020			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr;chen	2016/4/12	John kine

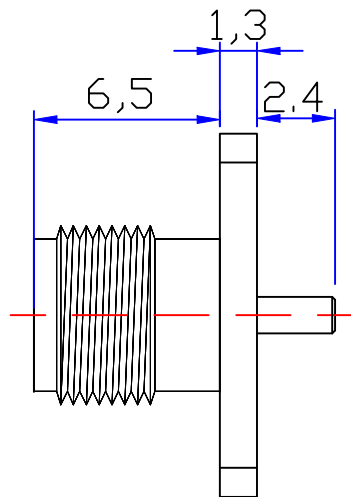

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHZ
 VSWR: 1.5MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -55°C TO +155°C
 Relative temperature: ≤95% (40° C ± 2° C)

1	Body	Brass	Au: 1u"	NOTE:	Tolerance	0-6	±0.10	 www.renhotec.com	
2	Insulator	TEFLON	White			6-30	±0.20		
3	Center contact	Phosphor	Au: 3u"			30-120	±0.30		
4						Angular	±2°		
5				DRAWN	2016/04/	View		Name: SMA panel jack 4-hole square flange mount	
6									Zelin.Zhang
7				CHECKED		UNIT	MM	SIZE	Product NO. RENHOTEC-612-0020
8				APPROVALS	12/04.2016	SCALE	1:1	DateTime	2016/4/12
9						John Kine		CAD FILE	D/company drawings/BD
10	Component Number	Material	Finish						