




Product NO.	Renhotec-612-0225			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/1	John kine

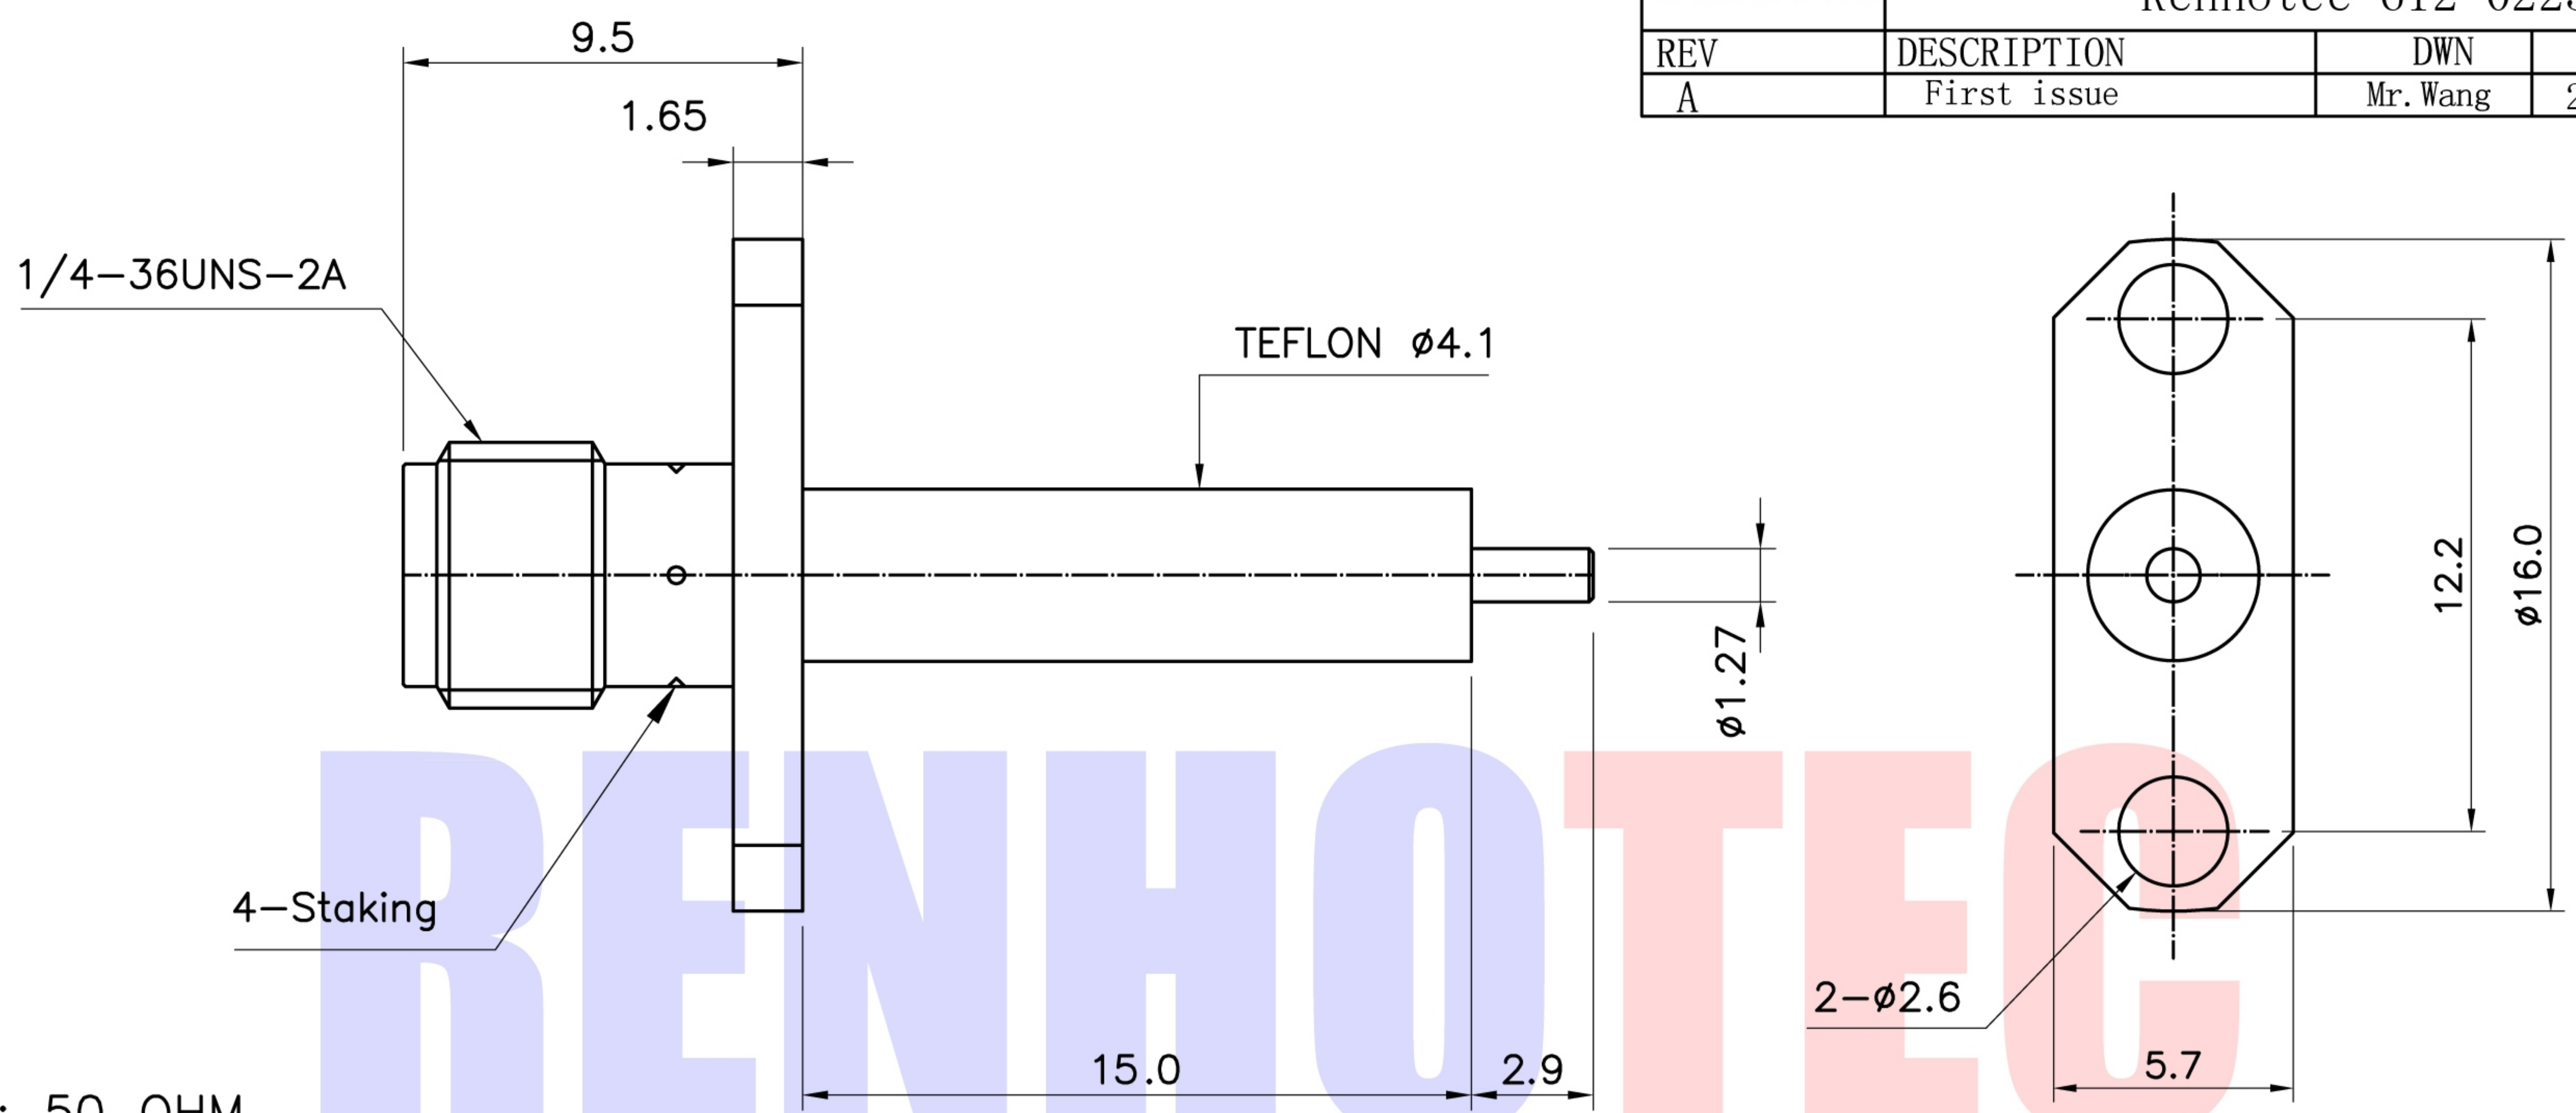

**SPECIFICATIONS**

- Impedance: 50 OHM
- Frequency Range: DC~18 GHz
- Voltage rating: 500 Vrms
- Dielectric Withstanding Voltage: 1500 Vrms
- Durability: 500 Cycles
- Contact retention 6lbs axial
- Temperature Range: -40 °C to +165 °C

Connector parts	Materials	Finish
Body	Brass	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

NOTE:		Tolerance	0-6	$\pm 0.10$
DRAWN Zelin. Zhang			6-30	$\pm 0.20$
2017/3/1		View	30-120	$\pm 0.30$
CHECKED			Angular	$\pm 2^\circ$
APPROVALS <i>John Kine</i>		UNIT	MM	
2017/3/1		SCALE	1:1	



**RENHOTEC GROUP**

Name:			SMA 2Hole Panel Female Micro Coaxial End Receptacle		
SIZE A	Product NO.	RHT-612-0225		REV	B
DateTime	CAD FILE	D/company drawings/BD		SHEET: 1 OF 1	
2017/3/1					