




Product NO.	Renhotec-612-0229			
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2017/3/1	John kine

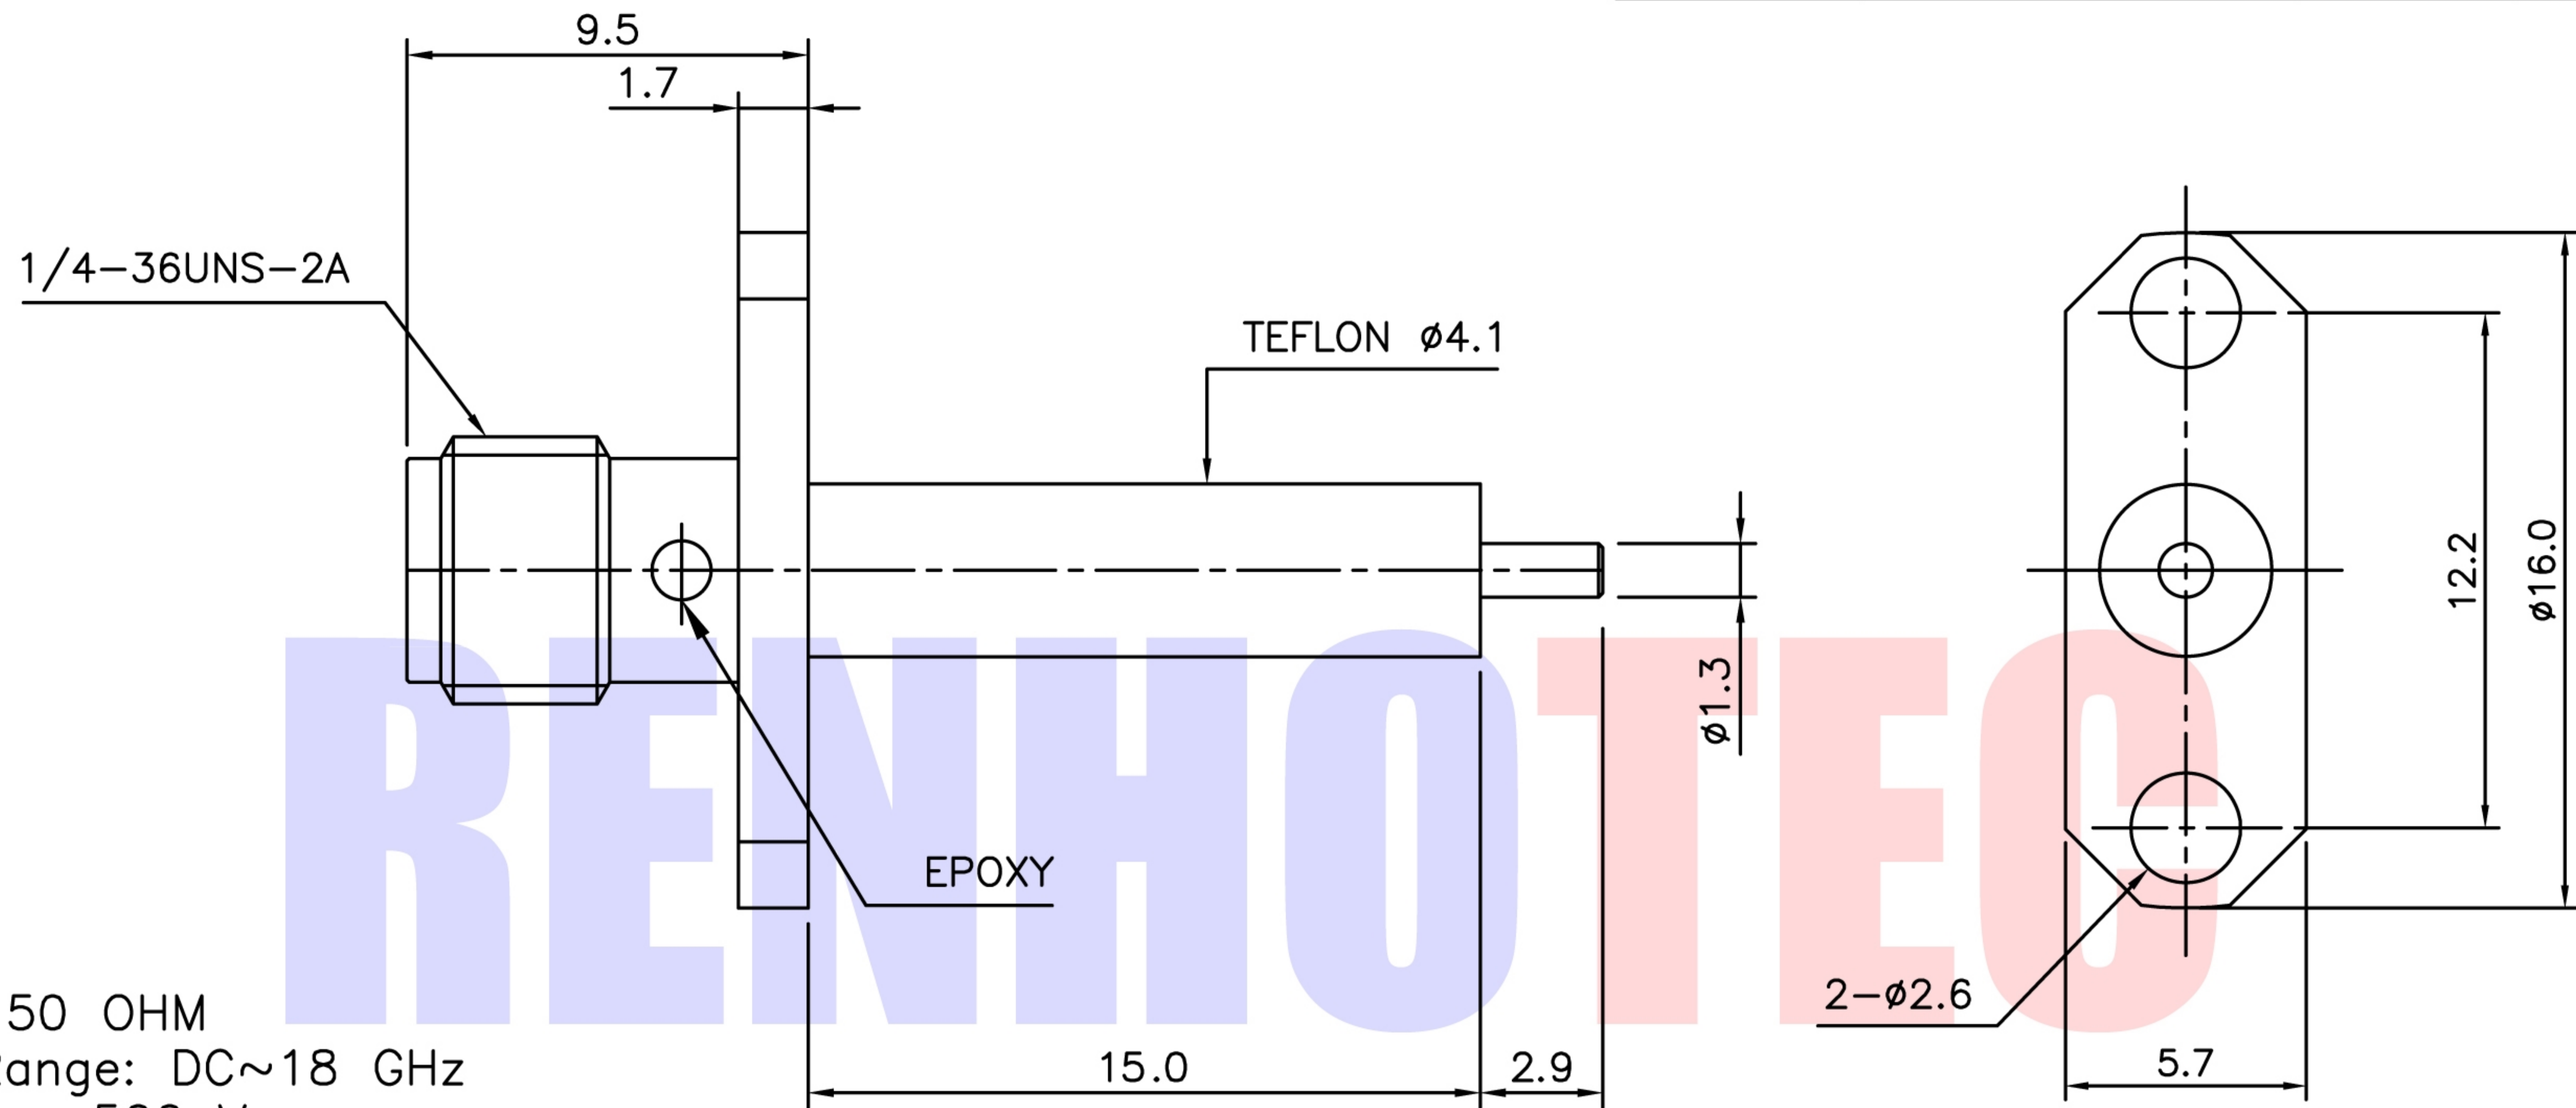

SPECIFICATIONS

Impedance: 50 OHM
 Frequency Range: DC~18 GHz
 Voltage rating: 500 Vrms
 Dielectric Withstanding Voltage: 1500 Vrms
 Durability: 500 Cycles
 Contact retention 6lbs axial
 Temperature Range: -4.0°C to +165°C
 Insulation resistance: 5000M Ω

Connector parts	Materials	Finish
Body	Stainless steel	Gold Plated
Center contact	Beryllium copper	Gold Plated
Insulator	PTFE	-

NOTE:		Tolerance	0-6	\pm 0.10
DRAWN Zelin. Zhang 2017/3/1			6-30	\pm 0.20
CHECKED		View	30-120	\pm 0.30
APPROVALS John Kine 2017/3/1			Angular	\pm 2°
		UNIT	MM	
		SCALE	1:1	



RENHOTEC GROUP

Name: SMA 2Hole Panel Female Micro Coaxial END Receptacle			
SIZE A	Product NO. RHT-612-0229	REV	
DateTime 2017/3/1	CAD FILE D/company drawings/BD	SHEET: 1 OF 1	