

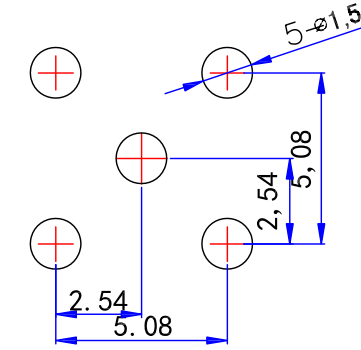


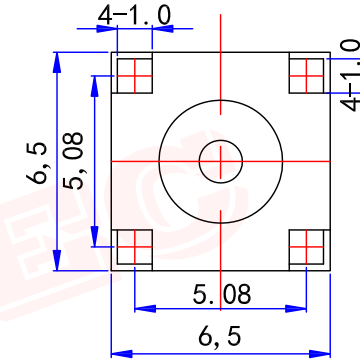

Product NO. RHT-612-0480


ISSUE	DESCRIPTION	DWN	DATE	APPROVEN
Frist	First issue	Gavin	2018/08/14	JIM. KING

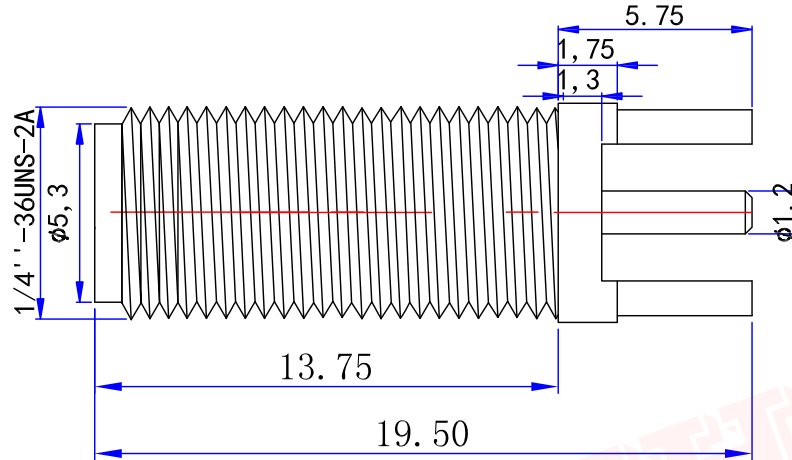

PCB

Specifications:

IMPEDANCE: 50 Ohms
 Frequency range: 0~6GHZ
 VSWR: 1.3MAX
 Working voltage: 500V rms @ sea level
 Insulation resistance: 5000 Ohms min
 Temperature range: -55°C TO +155°C
 Relative temperature: ≤95%(40° C ± 2° C)

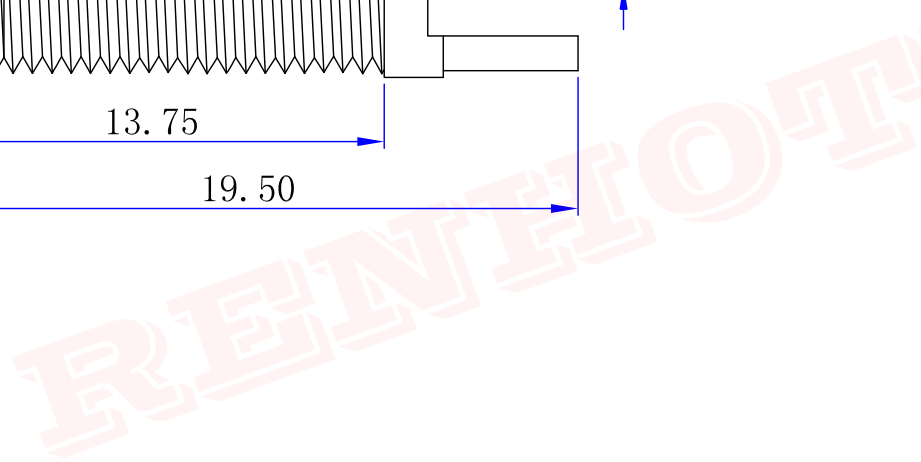

NO	DESCRIPTION	MATERIAL	FINISH	QTY
3	PIN	BRASS	GOLD	
2	INSULATOR	TEFLON	WHITE	
1	BODY	BRASS	GOLD	

-TOLERANCES- UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.10mm 8 - 30mm ± 0.15mm 30 - 120mm ± 0.20mm	RENHOTEC GROUP www.renhotec.com		PART DESCRIPTION: SMA Jack FOR PCB Connector			
	Appr: JIM. KING Check: Draw: Gavin	P/N: RHT-612-0480 Date: 2018.08.14 Scale: Free Unit: MM		Type: Z	Page: 1/1	